

January 01, 2008

Optimal ordering policy for product acquisition in a remanufacturing system

Surendra M. Gupta
Northeastern University

Kenichi Nakashim
Northeastern University

Recommended Citation

Gupta, Surendra M. and Nakashim, Kenichi, "Optimal ordering policy for product acquisition in a remanufacturing system" (2008).. Paper 85. <http://hdl.handle.net/2047/d10013623>

This work is available open access, hosted by Northeastern University.



Laboratory for Responsible Manufacturing

Bibliographic Information

Nakashima, K. and Gupta, S. M., "Optimal Ordering Policy for Product Acquisition in a Remanufacturing System", *Proceedings of the 2008 Northeast Decision Sciences Institute Conference*, Brooklyn, New York, March 28-30, 2008 (CD-ROM).

Copyright Information

Copyright 2008, Surendra M. Gupta.

Contact Information

Dr. Surendra M. Gupta, P.E.
Professor of Mechanical and Industrial Engineering and
Director of Laboratory for Responsible Manufacturing
334 SN, Department of MIE
Northeastern University
360 Huntington Avenue
Boston, MA 02115, U.S.A.

(617)-373-4846 **Phone**
(617)-373-2921 **Fax**
gupta@neu.edu **e-mail address**

<http://www.coe.neu.edu/~smgupta/> **Home Page**

OPTIMAL ORDERING POLICY FOR PRODUCT ACQUISITION IN A REMANUFACTURING SYSTEM

Kenichi Nakashima, Osaka Institute of Technology, Osaka, Japan, +81(6)-6954-4788, nakasima@dim.oit.ac.jp

Surendra M. Gupta*, Northeastern University, Boston, MA 02115, (617)-373-4846, gupta@neu.edu

(*Corresponding author)

ABSTRACT

This paper deals with the product acquisition problem and considers returned product quality. The system includes the flow of the product returns from customers to the factory as well as the forward flow of the sales. We formulate the acquisition problem together with product quality and stochastic demand using the Markov decision process. A numerical example is considered to show the implementation of the methodology.

INTRODUCTION

The continuous growth in consumer waste in recent years has seriously threatened the environment. According to the US Environmental Protection Agency (EPA), in 1990, the amount of waste generated in the USA reached a whopping 196 million tons, up from 88 million tons in 1960s [13]. Wann [16] reported that an average American consumes 20 tons of materials every year. To ease such burden on the environment, many countries are contemplating regulations that force manufacturers to take back used products from consumers so that the components and materials retrieved from the products may be reused and/or recycled. For example, Germany has passed a regulation that requires companies to remanufacture products until the product is obsolete. Japan has passed similar legislation requiring design and assembly methodologies that facilitate recycling of durable goods [4]. Comparable regulations are also being considered in the United States. The two legislative acts that are expected to pass within the next few years in the U.S. are the Automotive Waste Management Act (which will enforce the complete reclamation of automobiles) and Polymers and Plastic Control Act (which will enforce the complete reclamation of polymers and plastics) [5].

This paper deals with the product acquisition problem and considers returned product quality. The system includes the flow of the product returns from customers to the factory as well as the forward flow of the sales. We formulate the acquisition problem together with product quality and stochastic demand using the Markov decision process. We consider a single process that produces a single item product. The finished products are stocked in the factory and are used to fulfill customer demand. The product is produced using a returned product that belongs to either class 1 or class 2 quality. Each class has different acquisition cost, different remanufacturing cost and different delivery lead time. Therefore, the decision maker has to control two kinds of inventories for the returned products.

The system is composed of the state that denotes the inventory levels of two quality types of the returned products, the transition probabilities between states under a policy and the costs associated with the transitions. In this model, we control the numbers of each type of returned products: one is of high quality (class 1) while the other is of lower quality (class 2). We also consider the priorities for the use of the two types of products. Using Markov decision model [12], we can obtain the optimal ordering

policy that minimizes the expected average cost per period. A numerical example is considered to illustrate the property of the control policy.

LITERATURE REVIEW

We present a brief review of the literature in the area of product recovery modeling of remanufacturing systems with stochastic variability.

Gungor and Gupta [4] and Moyer and Gupta [9] reviewed the literature in the area of environmentally conscious manufacturing and product recovery. Minner [8] pointed out that there are the two well-known streams in product recovery research area. One is stochastic inventory control (SIC) and the other is material requirements planning (MRP). In this paper, we restrict ourselves to SIC.

Cohen et al. [2] developed the product recovery model in which the collected products are directly used. Inderfurth [7] discussed effect of non-zero leadtimes on product recovery. Muckstadt and Isaac [10] dealt with a model for a remanufacturing system with non-zero leadtimes and a control policy with the traditional (Q, r) rule. Van der Laan and Salomon [14] suggested push and pull strategies for the remanufacturing system. Guide and Gupta [3] presented a queueing model to study a remanufacturing system. Nakashima *et al.*[11] considered a product recovery system with a single class product life cycle.

FORMULATION

We formulate a product acquisition system with stochastic variability using a discrete time Markov decision model. We consider a single process that produces a single item product. The finished products are stocked in the factory and are used to fulfill customer demand. The product is produced using a returned product that belongs to either class 1 or class 2 quality. Each class has different acquisition cost, different remanufacturing cost and different delivery lead time. Therefore, the decision maker has to control two kinds of inventories for the returned products.

Figure 1 shows the product acquisition system in a remanufacturing environment. Remanufacturing preserves the product's identity and performs the required disassembly and refurbishing operations to bring the product to a desired level of quality at some remanufacturing cost. The number of products produced using normal manufacturing in period t is denoted by $P(t)$. All production begins at the start of a period and all products are completed by the end of the period. Product demand is independent and identically distributed (i.i.d) with mean D . The process produces the products using the recovered products that are supplied by two different suppliers with each own acquisition cost. It is assumed that the leadtime of the part delivery is one. We use the following notations.

- $I_n(t)$:inventory of class n ($n=1,2$) at the beginning of period t
- $O_n(t)$:ordering quantity of class n at the beginning of period t
- k_n :action as ordering part of class n ($k_n = O_n(t)$)
- $D(t)$:demand in period t
- a_n :acquisition cost per unit part for supplier n
- h_n :holding cost per unit part supplied by supplier n
- c_n :remanufacturing cost using part class n

$P_n(t)$:production quantity using pert class n in period t

C_b :backlog cost

The state of the system is denoted by

$$s(t) = (I_1(t), I_2(t))$$

Production Policy

$$P_1(t) = \min \{D(t), [I_1(t)]^+\}$$

$$P_2(t) = \max \{0, D(t) - [I_1(t)]^+, I_2(t)\}$$

where $[x]^+ = \max\{0, x\}$.

$$I_1(t+1) = I_1(t) + O_1(t-1) - P_1(t)$$

$$I_2(t+1) = I_2(t) + O_2(t-1) - P_2(t)$$

Action spaces are shown by

$$K_1(s(t)) = \{0, \dots, I_{\max 1} - I_1 - O_1(t-1)\}$$

and $K_2(s(t)) = \{0, \dots, I_{\max 2} - I_2 - O_2(t-1)\}$.

Each action means that

$$k_1 = O_1(t), k_2 = O_2(t).$$

Transition Probability is

$$P_{s(n),s(n+1)}(k_1, k_2) =$$

$$\begin{cases} \Pr\{D(t) = d\}, s(t+1) = \{I_1(t) + k_1 - P_1(t), I_2(t) + k_2 - P_2(t)\} \\ \text{Otherwise} \quad \quad \quad , 0. \end{cases}$$

The expected cost is given by

$$r_{s(t)}(k) = \sum_{n=1}^2 (k_n a_n + c_n P_n(t) + h_n I_n(t)) + c_b \max\{0, D(t) - (I_1(t) + I_2(t))\}$$

Optimal equation is shown by the following;

$$g + v_i = \min_{k_1 \in K_1(i), k_2 \in K_2(i)} \left\{ r_i(k_1, k_2) + \sum_{j \in S} p_{ij}(k_1, k_2) v_j \right\} \quad (i \in S)$$

We can calculate the stationary distribution of the system by solving a set of linear equations of the steady state distribution. We can then obtain the total expected cost per period using the above equation.

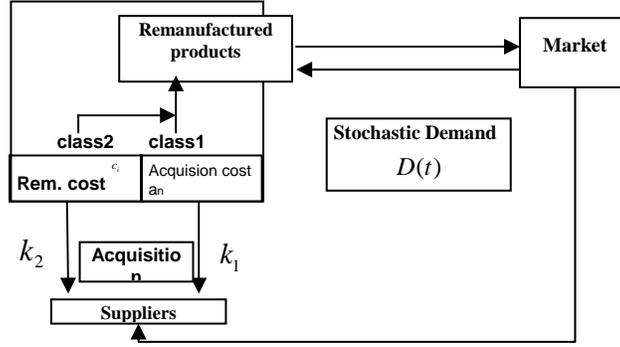


Fig.1: Product Acquisition Model

NUMERICAL RESULTS

In this section, we obtain the optimal ordering policy for a product acquisition system under stochastic demand.

The distribution of the demand is given by

$$\Pr\{D_n = D - \frac{1}{2}Q + j\} = \binom{Q}{j} \left(\frac{1}{2}\right)^Q, (0 \leq j \leq Q)$$

where $D=3$ and Q is an even number and the variance(σ^2) is $Q/4$. We can obtain the expected average cost per period under the steady state of the system.

It is assumed that the maximum number of each inventory, $Imax_n=10$. The cost parameters are set as follows:

$$h_n=1(n=1,2), \quad a_1=4, \quad a_2=1, \quad \text{and} \quad c_b=10.$$

We also assume that $C_1=1$, $C_5=1$ and $Q=3$. We can obtain the optimal policy using policy iteration method. Table 1 shows it under steady state with minimum cost, which is 28.94.

Table 1: Optimal ordering policy

$(I_1(t), I_2(t))$	k_1	k_2
(2, 2)	4	1
(3, 1)	3	2
(3, 2)	3	1
(4, 1)	2	2
(4, 2)	2	1
(4, 3)	2	0
(5, 3)	1	0

CONCLUSION

We formulated the acquisition problem together with product quality and stochastic demand using the Markov decision process in a remanufacturing system. Numerical results showed the optimal ordering policy that minimized the expected average cost per period for the product acquisition system with different kinds of quality classes.

ACKNOWLEDGMENT

This research is supported in part by JSPS Grants-in-Aid for Scientific Research No. 19510161.

REFERENCES

- [1] Brennan, L., Gupta, S. M. and Taleb, K. N., 1994, Operations Planning Issues in an Assembly/ Disassembly Environment, *International Journal of Operations and Production Management*, 14(9), 57-67.
- [2] Cohen M.A., Nahmias S., Pierskalla W. P., 1980, A dynamic inventory system with recycling. *Naval Research Logistics Quarterly*, 27, 289-296.
- [3] Guide Jr., V. D. R. and Gupta, S. M., 1999 (Mar. 1-3), A Queueing Network Model for Remanufacturing Production Systems, *Proceedings of the Second International Seminar on Reuse*, Eindhoven, The Netherlands, 115-128.
- [4] Gungor, A. and Gupta, S. M., 1999, Issues in environmentally conscious manufacturing and product recovery: a survey. *Computers and Industrial Engineering*, 36, 811-853.
- [5] Guide, V.D.R., Srivastava, R. M. and Spencer S., 1996, Are production systems ready for the green revolution. *Production and Inventory Management Journal*, 37, 70-76.
- [6] Gupta, S. M. and Taleb, K. N., 1994, Scheduling Disassembly. *International Journal of Production Research*, 32, 1857-1866.
- [7] Inderfurth K., 1997, Simple optimal replenishment and disposal policies for a product recovery system with lead-times. *OR Spektrum*, 19, 111-122.
- [8] Minner S., 2001, Strategic safety stocks in reverse logistics supply chains, *International Journal of Production economics*, 71, 417-428.
- [9] Moyer, L. and Gupta, S. M., 1997, Environmental Concerns and Recycling/ Disassembly Efforts in the Electronics Industry, *Journal of Electronics Manufacturing*, 7, 1-22.
- [10] Muckstadt J.A. and Isaac M.H., 1981, An analysis of single item inventory systems with returns. *Naval Research Logistics Quarterly*, 28, 237-254.
- [11] Nakashima, K., Arimitsu, H., Nose, T. and Kuriyama, S., 2002, Analysis of a product recovery system: *International Journal of Production Research*, 40, 3849-3856.
- [12] Nakashima, K., Arimitsu, H., Nose, T. and Kuriyama, S., 2004, Optimal control of a remanufacturing system: *International Journal of Production Research*, 42, 3619-3626.
- [13] Nasr, N., 1997, Environmentally conscious manufacturing. *Careers and Engineer*, 26-27.
- [14] van der Laan E.A. and Salomon M., 1997, Production planning and inventory control with remanufacturing and disposal. *European Journal of Operational Research*, 102, 264-278.
- [15] Puterman, M. L. 1994. *Markov Decision Processes*. New York (John Wiley & Sons): Discrete Stochastic Dynamic Programming.
- [16] Wann, D., 1996, *Deep Design: Pathways to a Livable Future*. Washington: Island Press.